

NOTES:

- Customers are responsible for confirming mounting heights, fixture suspension types/ lengths, color temperature, CRI, linear fixture lengths, pole lengths, and bollard heights/ lengths prior to ordering.
- Mounting height (MH) is measured from the bottom of the fixture to the floor.
- This Lighting layout assumes the following unless values are specified and must be confirmed by the customer prior to ordering.
 - Room reflectance of 80, 50, 20 for standard ceilings and 50, 50, 20 for exposed ceilings
 - Wall sconces are mounted at 7' for calculation purposes. Customer must confirm desired mounting height before rough in.

Qty	Label	Arrangement	LLF	MFR	Description	Lum. Watts	Total Watts	Lum. Lumens
16	OW1	Single	0.900	LITHONIA	WPX1 LED P2 x4x Mvot	24.42	350.72	2913
18	OW4	Single	0.950	LITHONIA	RSX1 LED P4 x4x R4- WBA	133.14	2396.52	18073
6	OW5	Single	0.950	ALIGHT	LIN 3 SP 4 L3 x4x U HE	19	114	2177

Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
SITE	Illuminance	Fc	0.61	7.95	0.00	N/A	N/A
PARKING AREA	Illuminance	Fc	1.40	5.2	0.3	4.67	17.33
TRUCK DOCK	Illuminance	Fc	1.21	7.9	0.0	N/A	N/A



Label	Height	Width	Depth	Weight	Power	Beam Angle	Mounting
WP1	13.75" (349 mm)	3.25" (82.5 mm)	4.75" (120.6 mm)	1.17 lbs (0.53 kg)	24.42 W	110°	Flush
WP2	14.75" (375 mm)	4.25" (108 mm)	4.75" (120.6 mm)	1.27 lbs (0.58 kg)	24.42 W	110°	Flush
WP3	15.75" (400 mm)	5.25" (133 mm)	4.75" (120.6 mm)	1.37 lbs (0.62 kg)	24.42 W	110°	Flush




EPA (H=90°): 0.57 m² (0.05 m²)

Length: 21.8" (55.4 cm) (SPA mount)



Width: 13.3" (33.8 cm)

Height: 3.0" (7.6 cm) Main Body
7.2" (18.4 cm) Arm

Weight: 22.0 lbs (10.0 kg)



Fixture	Output	Optics	Output	Input Watts	Delivered Efficacy
LIN3SP	LVR (Very High)	HE Tech™	1243 lm/ft	12.5 W/ft	101 lm/W
LIN3WP	LVR (Very High)	HE Tech™	1300 lm/ft	12.5 W/ft	104 lm/W

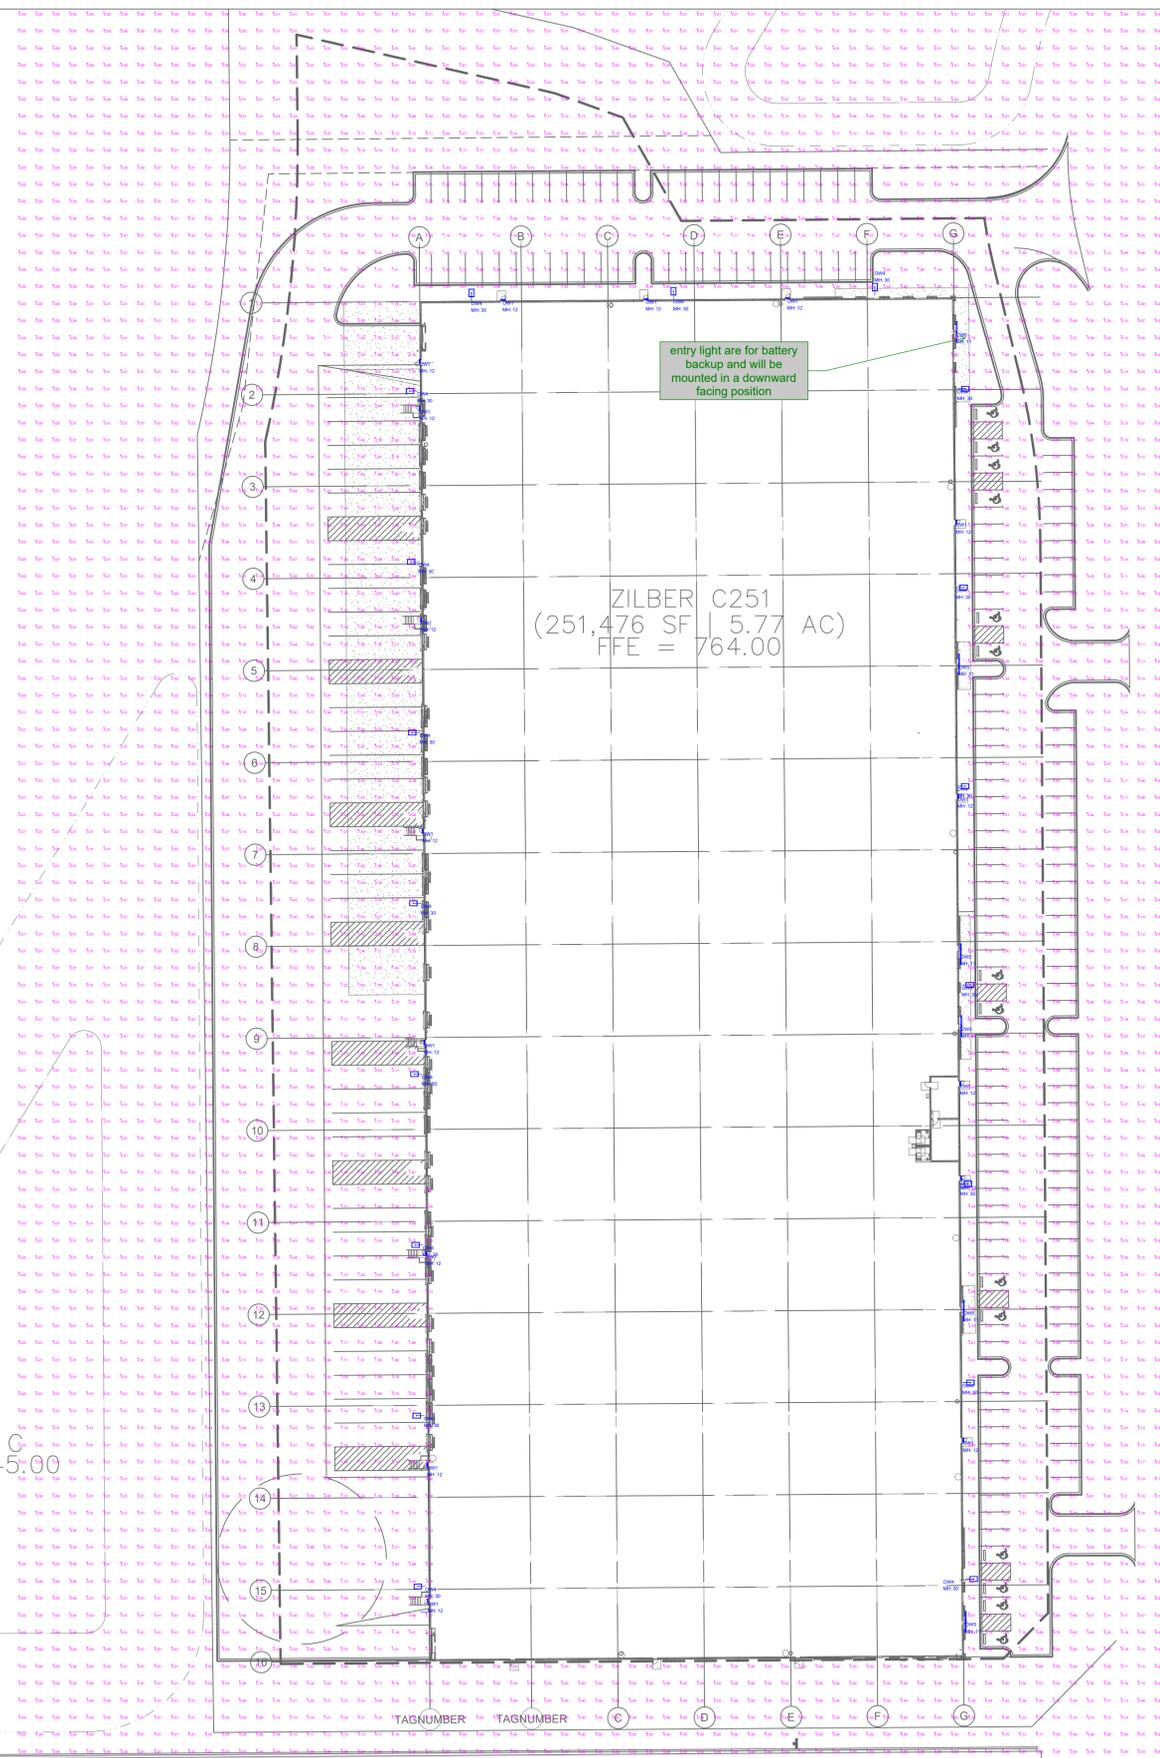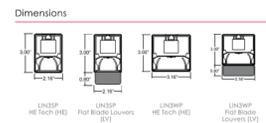

DATE	COMMENTS

#	DATE	COMMENTS

DRAWN BY : AD

DATE : FEB 5, 2026

SCALE : 1" = 50'-0"

ZILBER C251